


- HMO2653R 26-3/4"L x 34-1/8"D x 53"H
- HMO3953R 38-3/4"L x 34-1/8"D x 53"H
- HMO5153R 50-3/4"L x 34-1/8"D x 53"H
- HMO6353R 62-5/8"L x 34-1/8"D x 53"H

Included

- Breeze w/EnergyWise s/c refrigeration
- Clear glass shelves, lighted (LED 3500K)
- Compressor air rear intake, front discharge. Toe kick cannot be blocked
- Condensate pan (self-contained refrig. only)
- Flat front panel
- Integrated average product temperature of 40°F or less
- LED 3500K top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Open reach-in front
- Shelving removable and adjustable on 1" centers
- Upper & lower rear areas white

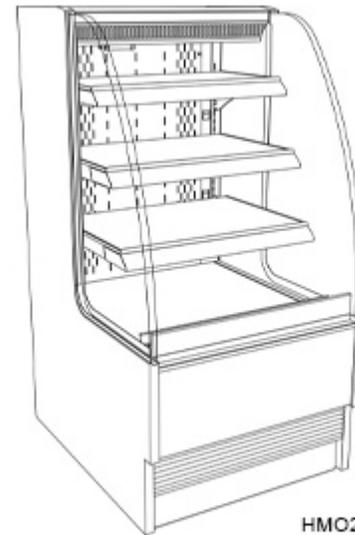


HMO2653R

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate - Standard colors	• All other laminates • Stainless steel (includes rear of case)
INTERIOR COLOR	• Black	• Stainless steel • White
REAR EXTERIOR COLOR	• Painted - White	• Painted - Black • Stainless steel (w/stainless ext. only)
TRIM COLOR	• Black	• Silver
BASE	• Levelers	• 6"H legs • Casters (n/a with remote)
END PANEL LEFT	• Full end panel w/mirror interior	• Cutaway with glass - cases cannot be joined w/o end panels
END PANEL RIGHT	• Full end panel w/mirror interior	• Cutaway with glass - cases cannot be joined w/o end panels
UPPER REAR	• Solid back panel	¹ • Clear glass rear sliding doors w/o lock ² • Solid rear swinging door(s) w/o lock (specify hinge LH or RH)
ELECTRICAL CONNECT	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.) • Electrical leads (remote)
REFRIGERATION	• Breeze w/EnergyWise s/c refrigeration	• Note: Remote doesn't incl Conds unit. Floor drain reqd. • Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		• Rear door lock • Second year parts & labor warranty (excludes compressor)
ACCESSORIES		• Clean Sweep® coil cleaner (n/a w/remote) • Night curtain, retractable, non-locking • Price tag molding (matches interior color) • Removable wire security cover, locking


Option Notes: 1 - HMO3953R; HMO5153R; HMO6353R
2 - HMO2653R

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

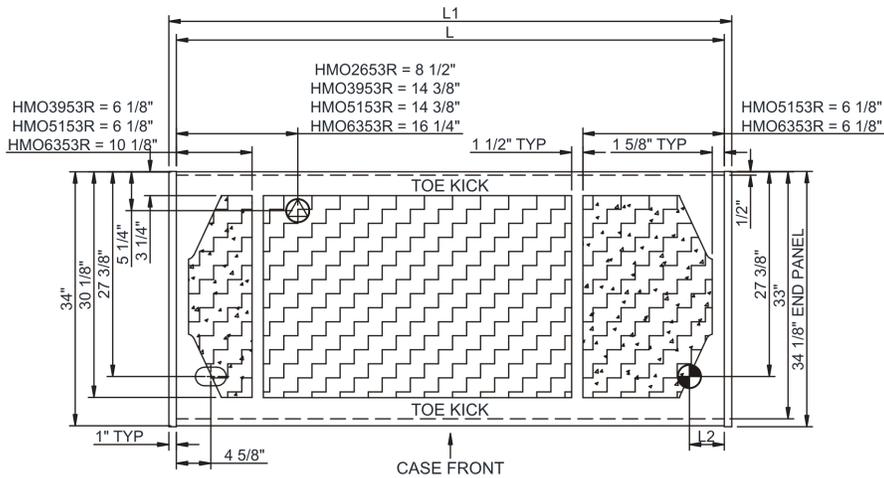

SIDE VIEW

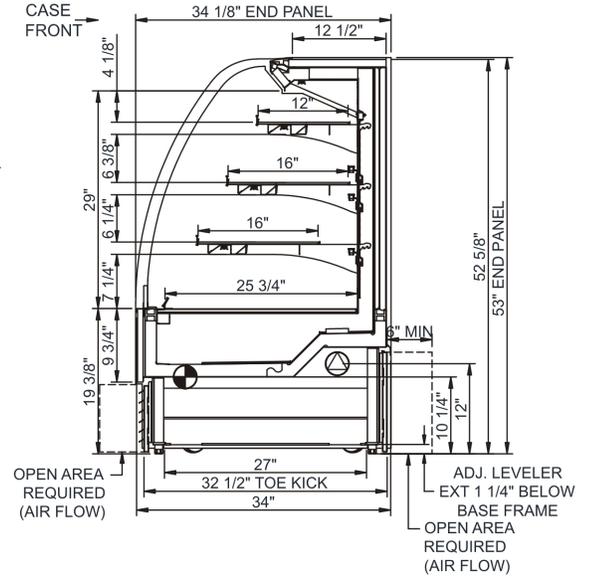

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack RTUH	Para. Rack RTUH	Est Wt
HMO2653R	24.75	26.75	4.88	Remote(Type I)	Circuit #1	110-120	1	60	1.11	116	2+G	Leads Multiple	24.00	2566	2376	650
				Self-Contained (R513A)	Circuit #1	110-120	1	60	14.84	1,234	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO3953R	36.75	38.75	4.88	Remote(Type I)	Circuit #1	110-120	1	60	1.20	131	2+G	Leads Multiple	24.00	3758	3480	800
				Self-Contained (R449A)	Circuit #1	110-120	1	60	14.56	1,273	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO5153R	48.75	50.75	4.88	Remote(Type I)	Circuit #1	110-120	1	60	2.03	210	2+G	Leads Multiple	24.00	4730	4380	900
				Self-Contained (R449A)	Circuit #1	110-120	1	60	16.00	1,639	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO6353R	60.63	62.63	4.88	Remote(Type I)	Circuit #1	110-120	1	60	1.90	110	2+G	Leads Multiple	20.00	5702	5280	1,100
				Self-Contained (R449A)	Circuit #1	208-240	1	60	12.00	1,920	2+G	6-15P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7
------------	---



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plum.
- 3) 35" Minimum door entry clearance required (without shipping skid).

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

LSU Health Sciences Center - Structural Concepts case

ITEM 6 - REFRIGERATED SELF-SERVICE CASE (1 REQ'D)

Structural Concepts Model HMO3953R Dimensions: 53(h) x 38.75(w) x 34.13(d)

Harmony® Self-Service Refrigerated Case, 38-3/4"W, open reach-in front, Breeze with EnergyWise self-contained refrigeration system with evaporator pan, (3) lighted glass shelves, top light, solid back panel, black interior, black trim, (2) full end panels with mirror, laminated exterior, levelers, cETLus, ETL-Sanitation

- 1 ea NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 1 ea NOTE: 35" minimum entry door clearance required (without shipping skid)
- 1 ea 1 yr. parts & labor warranty, 5 yr. compressor warranty, standard
- 1 ea Self-contained refrigeration system, standard
- 1 ea 110-120v/60/1ph, 14.56 amps, standard
- 1 ea 6 ft straight blade power cord with NEMA 5-20P (self-contained), standard
- 1 ea NOTE: Compressor air intake from rear & out front panel, front panel cannot be blocked (Not applicable with remote refrigeration option)
- 1 ea Base Support: Units are supplied with levelers extended 1-1/4" & MUST be adjusted during installation to ensure unit is level for operation
- 1 ea Exterior: Wilsonart or Formica NON-PREMIUM laminate (Color chart available from factory rep or access color selections via www.wilsonart.com or www.formica.com)
- 1 ea Rear Exterior: Black, painted
- 1 ea Trim: Black, standard
- 1 ea Upper rear: Solid back panel, standard
- 1 ea Left End Panel: Cutaway with clear glass (cannot be joined without end panels)
- 1 ea Right End Panel: Cutaway with clear glass (cannot be joined without end panels)
- 1 ea Security Cover: Removable wire, locking
- 1 ea Night cover, retractable, non-locking
- 1 ea Digital fahrenheit thermometer, standard
- 1 ea NOTE: Exterior laminate to be WilsonArt D91-60 slate grey.